



ACME MANUFACTURING CORP.
6532 TOWER LANE, CLAREMORE, OK. 74019

ENGINEERED PRODUCTS BY CRAFTSMEN

Extruded Aluminum Intake or Relief Vent Type LV

STANDARD FEATURES

Extruded aluminum louvers are .081" thick, precision mitered at corners and welded for maximum strength.


Removable hood constructed of .050" aluminum, reinforced and braced for extra strength.

Base constructed of .080" aluminum with mitered corners and seams that are continuous welded for strength and water tightness.


Bird screen of 1/2" x 1/2" mesh galvanized welded wire.

OPTIONS

- Anti-condensate undercoating.
- Hood insulated with 1" bat type fiberglass.
- Aluminum mesh cleanable filters, 1" or 2" thick.
- Aluminum insect screen in perimeter opening.
- Extra internal reinforcement and bracing.
- Protective or decorative coatings.

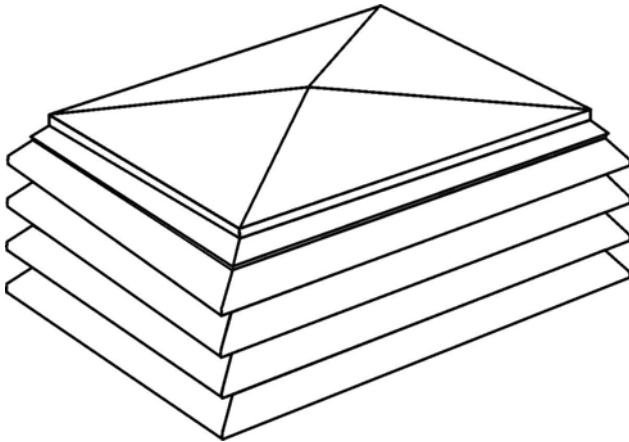

PROJECT	
LOCATION	
ARCHITECT	
ENGINEER	
CONTRACTOR	
SUBMITTED BY	
DATE	PO#

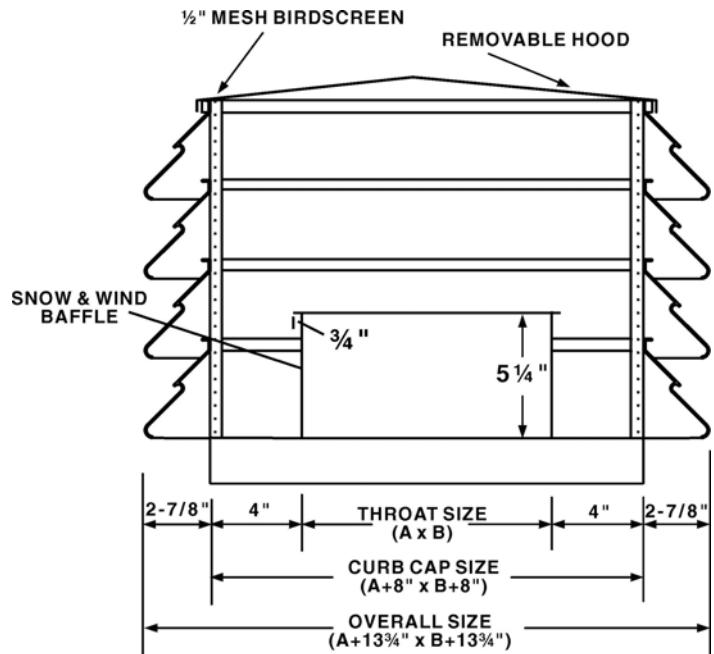

SPECIFICATIONS AND DIMENSIONS

REFERENCE	Throat Width A	Throat Length B	Hood Height E*	NO. TIERS	CFM	SP	OPTIONS

*HEIGHT = 3 1/2" TIMES NUMBER OF TIERS