Self-Flashing Curb Type SFWN

(With Wood Nailer)

STANDARD FEATURES

Constructed of 18 ga. galv. steel with continuous welded seams and integral base plate for water tightness and extra strength.


Wide base flashing to insure adequate bond to roofing surface for water-tight seal to roof.


Lined with 1½" fiberglass fire proof sound attenuating thermal insulation.


2 x 2 wood nailer secured to top ledge of curb.

OPTIONS

- Constructed of .063" aluminum.
- Interior metal liner.
- Standard heights of 12, 14, 16, 18, 20, 24", or any special height.
- Damper shelf standard or custom size opening.
- Wide flange (6" or 8" wide).
- Back draft damper.
- Damper motor, 120, 240, or 480 vac.
- Protective or decorative coatings.
- Heavy-gage construction.





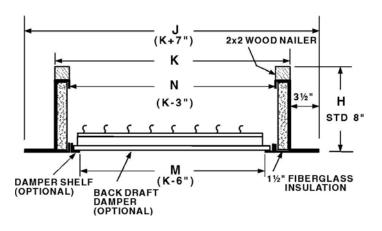

SPECIFICATIONS AND DIMENSIONS							
REFERENCE	QUAN.	MAT'L	K	N	M	Н	OPTIONS