



ACME MANUFACTURING CORP.
6532 TOWER LANE, CLAREMORE, OK. 74019

ENGINEERED PRODUCTS BY CRAFTSMEN

Sound Attenuating Curb Self-Flashing Base Type SFSC

STANDARD FEATURES

Constructed of 18 ga. galvanized steel with continuous welded seams for water tightness and extra strength.



Contains a streamlined core of modular type special acoustical glass fiber sound absorbing cells in a galvanized steel frame that reduces the transmitted noise by approximately 40% and reduces total air flow by only 3 or 4%.

Fully insulated with 1½" fiberglass sound attenuating thermal insulation. Top ledge covered with 1/4" polystyrene gasket for weather seal and to reduce metal to metal conducted noise.

Wide base flashing to insure adequate bond to roofing surface for water tight seal to roof.

OPTIONS

- Constructed of .063" aluminum.
- Special damper box to accommodate a back draft damper.
- 2 x 2 wood nailer secured to top ledge of curb in lieu of polystyrene gasket.
- Special size curbs.
- Wide flange (6" or 8" wide).
- Back draft damper.
- Motor for back draft damper, 120, 240, or 480 vac.
- Protective or decorative coatings.
- Treated wood nailer.
- Heavy-gage construction.

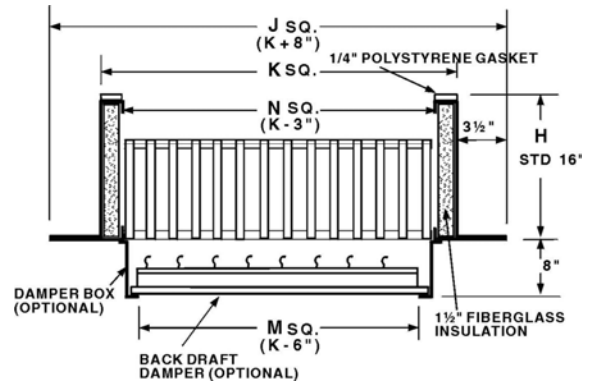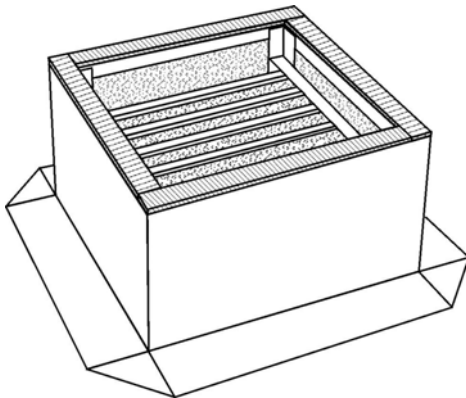

PROJECT	
LOCATION	
ARCHITECT	
ENGINEER	
CONTRACTOR	
SUBMITTED BY	
DATE	PO#

SPECIFICATIONS AND DIMENSIONS

REFERENCE	QUAN.	MAT'L	K	N	M	H	OPTIONS