

## Pipe Curb Collar Type PCC

STANDARD FEATURES

Constructed of 18 ga. galv. steel with continuous welded seams and integral base plate for water tightness and extra strength.

Lined with 1½" fiberglass fire proof sound attenuating thermal insulation.

2 x 2 treated wood nailer.


Galvanized flashing cap with hole and welded collar for pipe.

Uses SF or RF curb. Curb style must be specified.

## **OPTIONS**

- Constructed of .063" aluminum.
- Interior metal liner.
- Heights of 8, 14, 16, 18, 20, 24".
- Heavy-gage construction.

PROJECT		
LOCATION		
ARCHITECT		
ENGINEER		
CONTRACTOR		
SUBMITTED BY		
DATE	PO#	

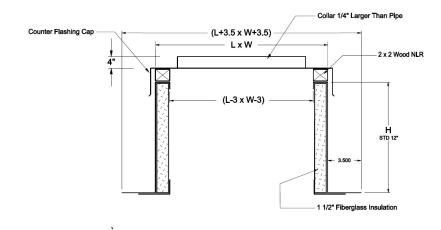

SPECIFICATIONS AND DIMENSIONS								
REFERENCE	QUAN.	O.D. CURB	PIPE SIZE	CURB TYPE	Н	OPTIONS		