Rooftop Equipment Curb Type RTU

STANDARD FEATURES

Constructed of 14 ga. galv. steel.

Internal dividers for supply, return and utility connections.


Self-flashing design with 2" bottom flange.


2" x 4" treated wood nailer.

Knockdown or factory welded construction.

OPTIONS

- Constructed of .080" aluminum or Galvalume.
- Any height.
- Pitched to match roof slope.



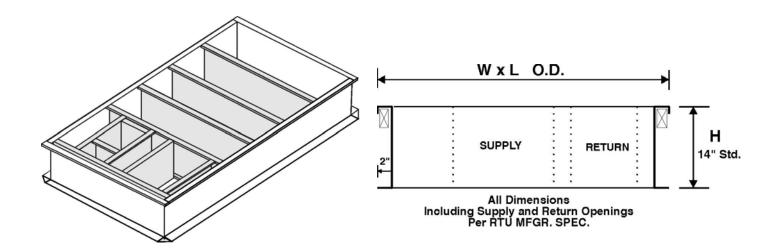

SPECIFICATIONS AND DIMENSIONS						
REFERENCE	QUAN.	MAT'L	L	W	Н	OPTIONS