Roof-Over-Flashing Curb Type RF

PROJECT

STANDARD FEATURES

Constructed of 18 ga. galv. steel with continuous welded seams and integral base plate for water tightness and extra strength.


Large $3^{"}$ built-in 45° cant to accommodate roofing to top of curb. Welded corners have beveled cants for better lay of roofing at corners.


2 x 2 wood nailer secured to top ledge of curb.


Lined with 1½" fiberglass fire proof sound attenuating thermal insulation.

OPTIONS

- Constructed of .063" aluminum.
- Interior metal liner.
- Standard heights of 12, 14, 16, 18, 20, 24", or any special height.
- Damper shelf standard or custom size opening.
- Back draft damper.
- Damper motor, 120, 240, or 480 vac.
- Protective or decorative coatings.
- Treated wood nailer.
- Heavy-gage construction.

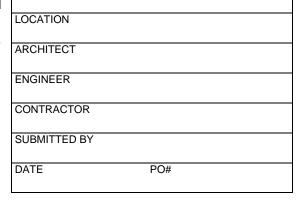

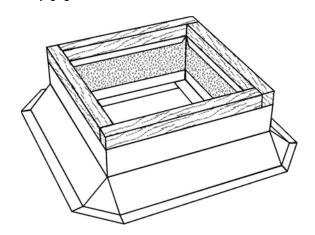

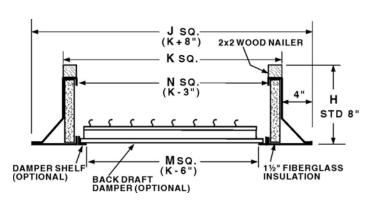

SPECIFICATIONS AND DIMENSIONS							
REFERENCE	QUAN.	MAT'L	К	N	M	Н	OPTIONS